

# Electric Steam Tables

## Standard Features

- Fully insulated wells—all four sides and bottom of wells are insulated by fiberglass, 8” deep, dry heating style
- Temperature control—individual infinite switch controls each well
- Two type heat elements—500 watt per well and 750 watt per well
- Stainless steel die-stamped opening—12”x20”, rising lip around well can keep well clean, and food pan to be easy to load and unload
- Poly cutting board-7” wide x 1/2” thick with 18 gauge stainless steel support shelf and brackets
- 18 gauge stainless steel top, body and under shelf
- Stainless steel tubular legs with adjustable stainless steel feet, getting table strong structure
- Indicator light of each well shows both power on and element heating
- Mechanical guards on all switches for safety and reliability
- Although intended for dry use, these steam table can be used wet with a compatible spillage pan(sold separately)

### MODELS:

CSTEА-2B/CSTEА-3B/CSTEА-4B/CSTЕB-5B


**CSTEА-2B**



**CSTEА-3B**




**CSTEА-4B**

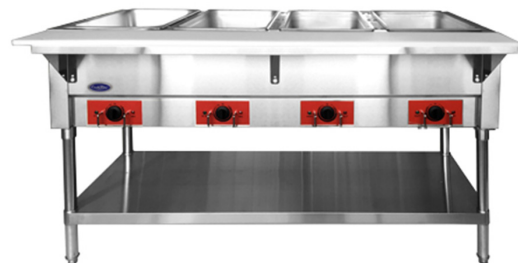

**CSTЕB-5B**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)



Conforms to ANSI  
STD Z83.11b-2009 (2011)  
Certified for CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



**SPECIFICATIONS**

Models	Volts	Wells	Watts/well	Total watts	PH	Top Opening	Cube ft. Crated	Plug	Dimensions (inch)	Weight (lbs)
CSTEA-2B	110V	2	500	1000	1	2	10.95	NEMA-5-15P	30×29 <sup>1/2</sup> ×33 <sup>1/2</sup>	49
CSTEA-3B	110V	3	500	1500	1	3	15.54	NEMA-5-15P	44 <sup>1/8</sup> ×29 <sup>1/2</sup> ×33 <sup>1/2</sup>	73.5
CSTEA-4B	110V	4	500	2000	1	4	19.78	NEMA-5-30P	58×29 <sup>1/2</sup> ×33 <sup>1/2</sup>	98
CSTEB-5B	240V	5	750	3750	1	5	29.66	NEMA-6-20P	72 <sup>1/2</sup> ×29 <sup>1/2</sup> ×33 <sup>1/2</sup>	122.5

**PLAN VIEW**

