

**MODELS:**

**ATTG-24 / ATTG-36 / ATTG-48**

# Thermostatic Griddles

## Standard Features

- Stainless steel exterior & interior
- Stainless steel grease drawer
- Heavy duty 1” thick polished steel griddle plate
- 25,000 BTU burners per 12” section with standby pilots
- Independent manual controls for each 12” section
- Stainless steel legs standard
- 3/4” NPT rear gas connection and regulator standard

**ATTG-24**



**ATTG-36**



**ATTG-48**



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)





Conforms to ANSI  
STD Z83.11b-2009 (2011)  
Certified to CSA  
STD 1.8B-2009 (2011)  
Conforms to NSF/ANSI STD.4



## SPECIFICATIONS

Models	Burners and control method	Gas type	Intake-tube presssure (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Work area (inch)	Net weight (lbs)	Gross weight (lbs)
ATTG-24	2 Burners Independent Manual Control	NG	4	25,000	50,000	4" w.c.	23 <sup>9/10</sup> × 19 <sup>9/10</sup>	160.9	195
		LP	10	25,000	50,000	10" w.c.			
ATTG-36	3 Burners Independent Manual Control	NG	4	25,000	75,000	4" w.c.	35 <sup>7/10</sup> × 19 <sup>9/10</sup>	229	280.9
		LP	10	25,000	75,000	10" w.c.			
ATTG-48	4 Burners Independent Manual Control	NG	4	25,000	100,000	4" w.c.	47 <sup>9/10</sup> × 19 <sup>9/10</sup>	294.5	415
		LP	10	25,000	100,000	10" w.c.			

## PLAN VIEW

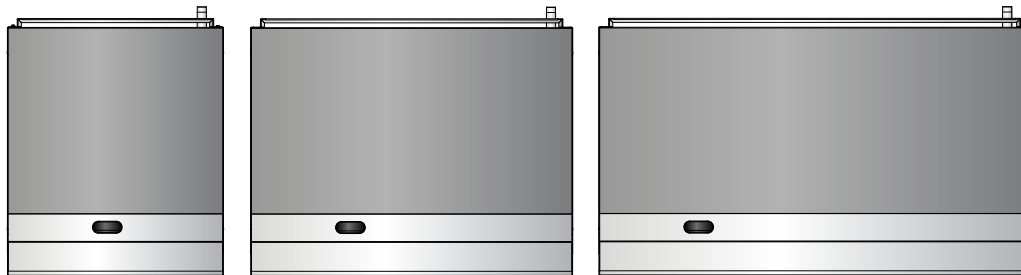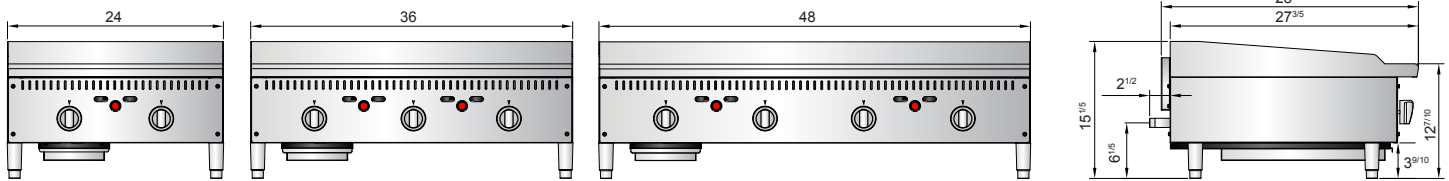

**ATTG-24**

**ATTG-36**

**ATTG-48**

