

Specifications

Weighing

Interval type	Single interval	Single interval	Multi-interval	
Capacity	Max. 30 lb	Max. 60 lb	Max. 30 lb	Max. 15kg
Scale interval	e=0.01 lb	e=0.02 lb	e=0.005/0.01 lb	e=2/5g
Weighing range	0.20-30 lb	0.20/60 lb	0.20-30 lb	40g-15kg

60 pound load cell optional

Thermal printer

Label type	Die-cut label	Linerless label
Label width	25-80mm/ 0.98-3.1 inches	44-80mm/ 1.73-3.14 inches
Label length	20-150mm/ 0.79-5.9 inches	20-300mm/ 0.79-11.8 inches
Label roll diameter	Max. 210mm (8.2 inches)	
Label roll core diameter	76mm (3.0 inches)	
Dot density	12 dot/mm (300dpi)	

Operation console

Display panel	TFT LCD color (12.1 inches) touch panel
Operation keys	Mechanical keys and touch screen
Memory for programmable files	8.8GB
Operating system	Linux

General

Power source and power consumption	• AC100-120V; 50/60Hz; 1.5A, 125W • AC120V; 60Hz; 1.5A, 125W • AC220-240V; 50/60Hz; 1.0A, 125W
Net weight	• Main unit (Standed configuration) • Main unit (Modular configuration)
• Scale platform	• Single labeler type: 16.5 kg/36.4 lb • Single labeler type: 19.7 kg/43.4 lb • Twin labeler type: 25.7 kg/56.7 lb 3.8kg/8.4 lb
Operation humidity	90%RH(max.) with no condensation
Optional features	WLAN IEE 802.11 a/b/g/n, Linerless Printer with Auto-Cutter, Second Printer



DPS-5600

High performance prepack scale printer

Standard Configuration
DPS-5600

Modular Configuration
DPS-5600M

Unit = in

With optional stand

DIGI LTD.

ISO 9001
ISO 14001
JQA-QM3646
JQA-EM1220

MS
JAB
CM009



Searching for a New Balance



*Specifications are subject to change without prior notice.

DIGI AMERICA Inc.

76 Veronica Ave, Somerset NJ 08873 USA
Tel: (732) 828 3633
Email: Marketing@us.digi-group.com
Web: www.digisystem.com/us



Two configurations to select from to support your prepack needs

Standard configuration
DPS-5600 requires less floor space and labels can be easily removed from the angled design.

Modular configuration
DPS-5600M provides flexibility in the layout of the console and labeler, even to mount on a hand wrap station.

DPS-5600


DPS-5600M
With optional stand



DPS-5600 Modular Single Printer
Shown with Optional Heat Seal
Energy Smart Wrap Station



DPS-5600 Modular
Twin Printer

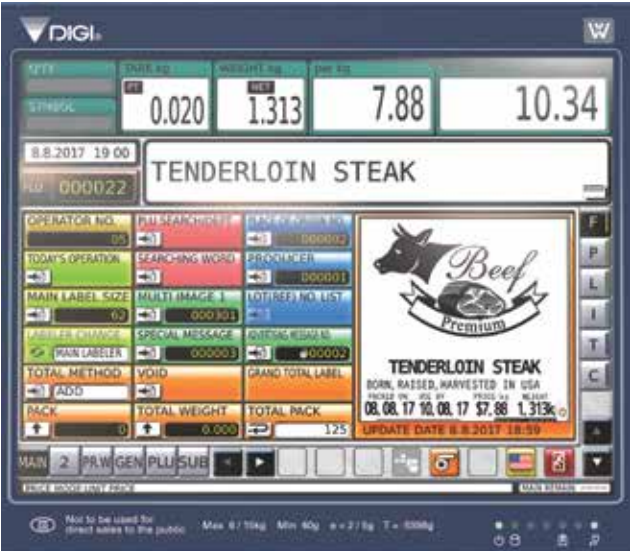

12.1 in Full Color Touch Screen
Label print content can be previewed on the display, helping to prevent labeling errors. Preset and frequently used function keys can be assigned for quick access. Size, color and location can be changed to suit your

80 mm Width 300 dpi Thermal Head
A new 300 dpi thermal head enables clear and crisp label print. The 800 mm of print width still allows large label sizes to be used for more information when needed. Head security function is equipped as standard, to prevent dot missing.

Multi-Language Operator Interface

Featuring Linerless Labeling

No More Wasted White Space
Auto-label-sizing feature eliminates unused space on the label and automatically adjusts the label size. This reduces the label cost and makes labels more attractive.

Increased Flexibility in Label Formats
The auto-cut features cuts from a continuous strip of Linerless labels every time a label is printed. Variable labels every time a label is printed. Variable label layouts and sizes can be printed from a single roll.



Cost Savings, Flexible on demand advertisement.
Pop Labels
An optional POP Labeler for a second eye catching label totally rationalizes your backroom operations by saving time, labor, and cost of labels.

