



External Dimensions (mm)

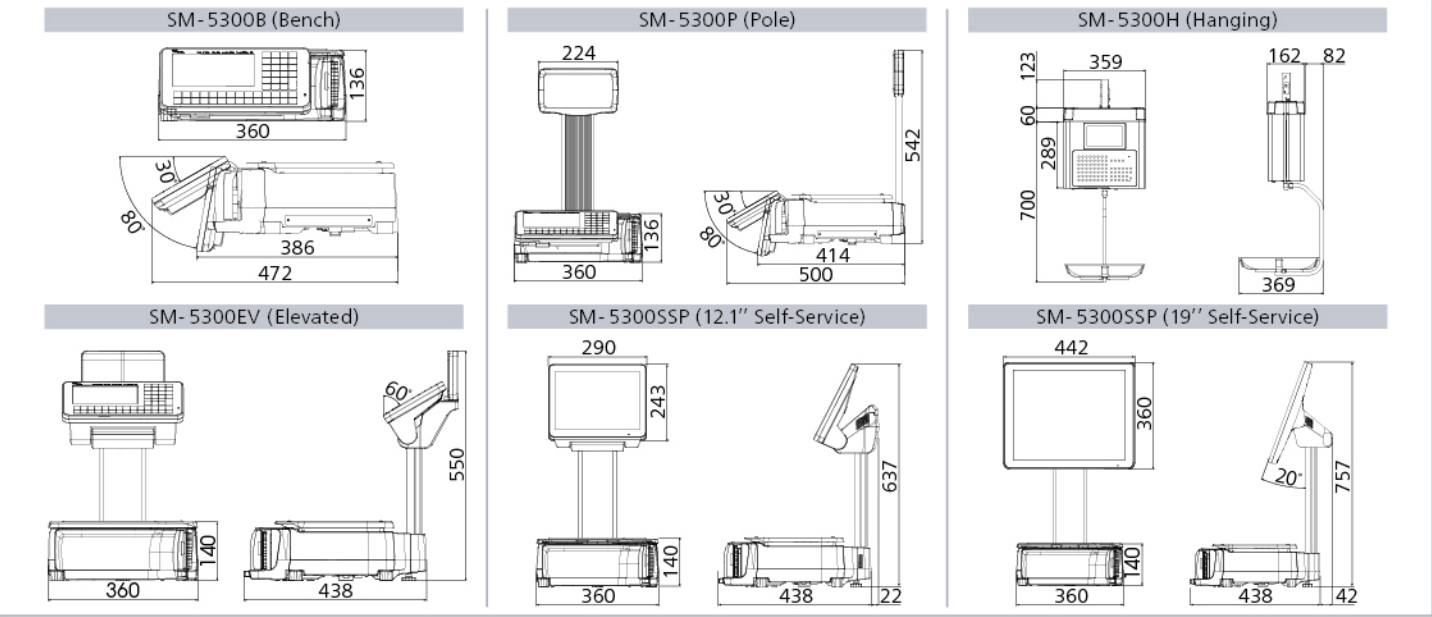

Specifications

Capacity	Max 6kg	Max 15kg / 30lb	Max 30kg
Single Interval	1 / 3,000	e = 2g	e = 10g
	1 / 6,000 or 1 / 7,500	e = 1g	e = 5g
Capacity	Max 3 / 6kg	Max 6 / 15kg	Max 15 / 30kg
Multi Interval	1 / 3,000	e = 1 / 2g	e = 5 / 10g

Model		SM-5300B (Bench)	SM-5300P (Pole)	SM-5300EV (Elevated)	SM-5300EV PLUS (Elevated)	SM-5300SSP (12.1" Self-Service)	SM-5300SSP (19" Self-Service)	SM-5300H (Hanging)
Dimension	WxDxH(mm)	360 x 472 x 136	360 x 500 x 542	360 x 438 x 550	360 x 438 x 642	360 x 460 x 637	442 x 480 x 757	359 x 369 x 883
Operator Display	7" WVGA with Touch (800 x 480)	○	○	○	○	—	—	○
	12.1" TFT SVGA with Touch (800 x 600)	—	—	—	—	○	—	—
	19" TFT SVGA with Touch (1280 x 1024)	—	—	—	—	—	○	—
Customer Display	7" WVGA (800 x 480)	○	○	○	—	—	—	○
	12.1" TFT SVGA (800 x 600)	—	—	—	○	—	—	—
Display Resolution		1 / 3,000, 1 / 6,000 & 1 / 7,500						
Number of Preset Keys		28 Preset Keys / 23 Alphanumeric Function Keys (For 7" Operator WVGA with Touch)						
	Types	Liner			Linerless With Auto-Cutter			
	Roll Diameter	125mm (Max)			95mm (Max)			
Label /	Print Width	56mm (Max)			56mm (Max)			
Receipt	Paper Width	70mm (Max)			62mm (Max)			
	Printing Speed	Up to 150mm / second*			100mm / second*			
	Print Resolution	200 dpi			200 dpi			
Power Source		AC 100 / 110 or 220 / 230 / 240 Volts (50 / 60 Hz) Auto Switch						
Operating Temperature		-10°C to +40°C						
Humidity		15% to 85% RH						
Standard Interface		Ethernet 10 / 100 Base T, 4 x USB 2.0, RJ11						
Net Weight		10.5 kg	11.5 kg	12.5 kg	16.0 kg	13.3 kg	17.0kg	14.0 kg



12.1" Customer Display

Options	Wireless LAN IEEE 802.11 a / b / g / n, BS-04, e.Label with Hi-Touch, InfoTag
Factory Option	Linerless Printer with Auto-Cutter, Speed ID

\*\* To achieve maximum print speed, high sensitivity thermal paper is necessary.



DIGI SINGAPORE PTE. LTD.  
4 Leng Kee Road #05-02 / 03 / 04 / 05 / 11 / 12  
SIS Building SINGAPORE 159088  
TEL : +65 6472 2996  
SALES: +65 6378 5387  
FAX : +65 6863 4614  
URL : [www.digisystem.com/sg/](http://www.digisystem.com/sg/)  
E-MAIL : [customer\\_support@sg.digi-group.com](mailto:customer_support@sg.digi-group.com)

TERAOKA SEIKO Co., Ltd.  
13-12 Kugahara 5-chome, Ohta-ku,  
Tokyo 146-8580, JAPAN  
TEL: +81-3-3752-2131  
FAX: +81-3-3752-5562  
URL: [www.digisystem.com](http://www.digisystem.com)

SM-5300 / H / 0818



SM-5300  
PC Based System Scale Printer



SM-5300EV

Searching for a New Balance



# SM-5300 Variations



SM-5300B



SM-5300P



SM-5300EV



SM-5300EV PLUS



SM-5300SSP (12.1")



SM-5300SSP (19")



SM-5300H



ESL replaces paper price tags with remote real-time pricing and promotional updates. It offers wide viewing angles with colour options and paper-like readability under retail store lighting conditions.

InfoTag..

Electronic Shelf Label



Designed with near-field technology, Speed ID can automatically detect clerk's ID for login. It can be configured to allow various levels of access to the scale database and generates an operational log for further analysis.

speedID

Intelligent Clerk Recognition



Print twice as many labels of varied length with a single roll of label! By eliminating the backing paper, operation downtime for changing of label rolls is reduced significantly.

Linerless Labeling

Flexible Label Design With Auto-Cutter



Simplify operations to call up PLU codes efficiently in 3 simple steps! Hi-touch PLU system reduces PLU entry errors.

Hi-Touch

Hi-Touch PLU System

3 Steps: Tap > Weigh > Print

## Integrated Solutions

Waste management

Reduce Food Waste

Track food wastage conveniently and efficiently with SM-5300. Waste Management helps you to boost profitability and minimise regulatory risk by making environmental practices an integral part of your daily operations. Generate reports for further evaluation and sourcing strategies.

@Label

Scale Management Software

Manage and monitor scale status and label design remotely at your convenience to reduce downtime. With @Label scale management software, you can update and configure scale software remotely and boost accurate data maintenance and store operation.

Queue management

Manage Queue Status Efficiently

SM-5300 supports both single and mobile queue solution for businesses. Efficient queue management helps to reduce potential walk-aways and loss of profit. It also increases operator service efficiency and enhances customer experience.

eLabel..

Seamless Price Updates

- Dust and water resistant
- Compatible with all DIGI PC based scales
- Efficient and responsive PLU call-up
- Operation temperature: 0°C to 40°C
- Available in 1.54", 2.7" and 4.2" display sizes

